

RAS SERIES

ORDER CODE

RAS-12-10-A

C: 1c
A: 1a
B: 1b
M: Automobile Relay

10: 10A
15: 15A
20: 20A

COIL VOLTAGE

TYPE

03: DC 3V
05: DC 5V
06: DC 6V
09: DC 9V
12: DC 12V
18: DC 18V
24: DC 24V
36: DC 36V
48: DC 48V



Main Features:

- UL, CUR & TUV safety approval.
- Heavy current up to 15 amps available, and special 20amps for using on the car.
- Epoxy seal type and flux free.
- Satisfying all requirements for use in car and household electric appliances.

COIL RATING (at 20°C)

Nominal Voltage (VDC)	Coil resistance (Ω) (+-10%)	Power Consumpt -10N (W)	Nominal Current (mA)(+-10%)	Pull In Voltage (VDC)	Drop Out Voltage (VDC)	Max Allowable Voltage (VDC)
3V	25 Ω	0.36W	120mA	75% Max.	10% Min.	130%
5V	69 Ω		72mA			
6V	100 Ω		60mA			
9V	225 Ω		40mA			
12V	400 Ω		30mA			
18V	900 Ω		20mA			
24V	1600 Ω		15mA			
36V	3600 Ω		10mA			
48V	4500 Ω	0.51W	10.6mA	65%	8%	110%
12V (M type)	225 Ω	0.64W	53.3mA			


PERFORMANCE (at initial value)

Item \ Type	10A	15A	20A
Contact Resistance	50mΩ Max (initial value)		
Operate Time	10m sec Max.		
Release Time	5m sec Max.		
Dielectric Strength between coil & contact between contact	Ac1500V (1min.) Ac750V (1min.)		
Insulation Resistance	100MΩ Min. (DC500V)		
Operating Ambient Temperature	-30°C ~ +80°C		
Humidity	35 to 85% RH		
Vibration Resistance	10G (10 ~ 55Hz) (Dual amplitude: 1.5mm)		
Shock Resistance	10G		
Life Expectancy Mechanically Electrically	10,000,000 ops . Min. (1800 ops./h) 100,000 ops. Min (1200 ops./h)		
Weight	9,5g (about)		


CONTACT RATING

Item \ Type	10A	15A	20A
Rated Carrying Current	AC 120V 10A AC 250V 7A DC 24V 10A	AC 120V 15A AC 250V 10A DC 24V 15A	DC 14V 20A DC 30V 15A AC 120V 15A
Max. Allowable Current	15A	20A	20A
Max. Allowable Voltage	AC 240V DC110V		
Max Current (continual)	10A	15A	20A
Contact Material	Ag alloy		

DIMENSIONS (Unit: mm)

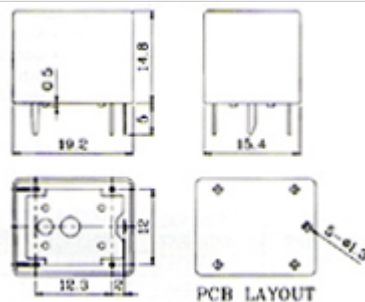

WIRING DIAGRAMS (Bottom View)

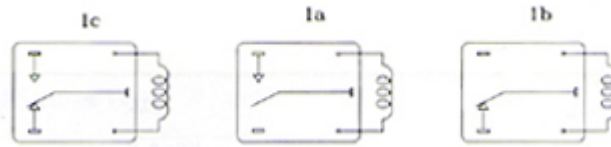

REFERENCE DATA

