


RHS SERIES

ORDER CODE

RHS-2-12D-5-P-L-T

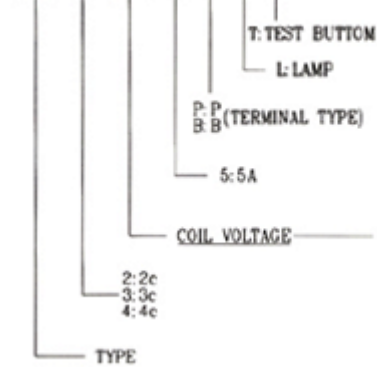

Main Features:

- From 2 pole to 4 pole.
- AC & DC coil.
- Lamp type & Test Button are all available.
- High reliability / Long life expectancy.

COIL RATING (at 20°C)

	Nominal Voltage (VDC)	COIL Resistance (Ω)(+/-10%)	Power Consumpt -10N(W)	Nominal Current (mA) (+/-10%)	Pull In Voltage (VDC)	Drop Out Voltage (VDC)	Max. Allowable Voltage (VDC)
DC	6V	40 Ω	0.9W	150.0mA	80% Max.	10% Min.	110%
	12V	160 Ω		75.0mA			
	24V	650 Ω		36.9mA			
	48V	2595 Ω		18.5mA			
	100V	11000 Ω		9.1mA			
	110V	13580 Ω		8.1mA			

	Nominal Voltage (VAC)	Power Consumpt -10N (VA)	Nominal Current (mA) (+/-10%)	Pull In Voltage (VAC)	Drop Out Voltage (VAC)	Max. Allowable Voltage (VAC)
AC	6V	1.2VA	250.0mA	80% Max.	30% Min.	110%
	12V		120.0mA			
	24V		60.0mA			
	48V		30.0mA			
	100V		15.0mA			
	110V		13.5mA			
	200V		9.0mA			
	220V		8.1mA			
	230V		7.8mA			
	240V		7.5mA			


PERFORMANCE (at initial value)




CONTACT RATING

Item \ Type	2c	3c	4c
Rated Carrying Current	AC 240V 5A AC 28V 5A		
Max. Allowable Current	5A		
Max. Allowable Voltage	AC 250V DC 125V		
Max Current (continual)	5A		
Contact Material	Ag Alloy		

DIMENSIONS (Unit: mm)

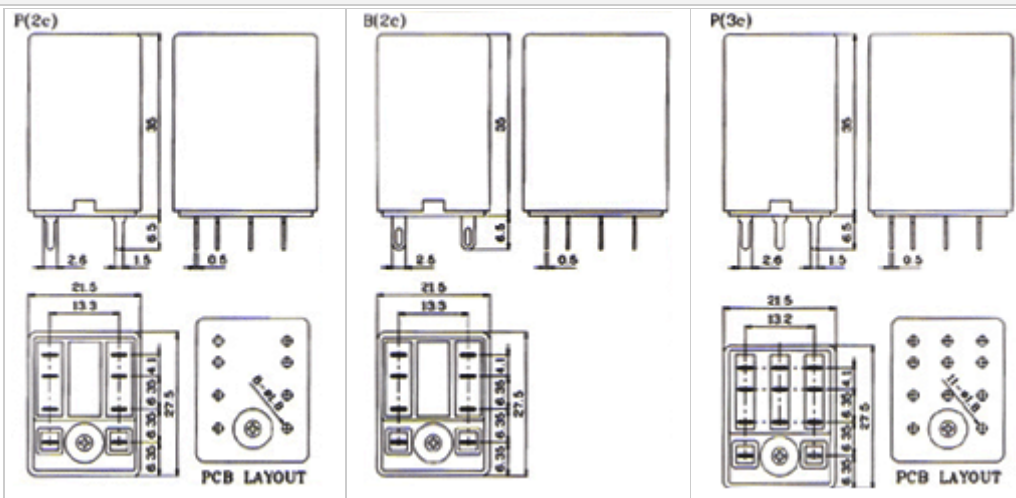

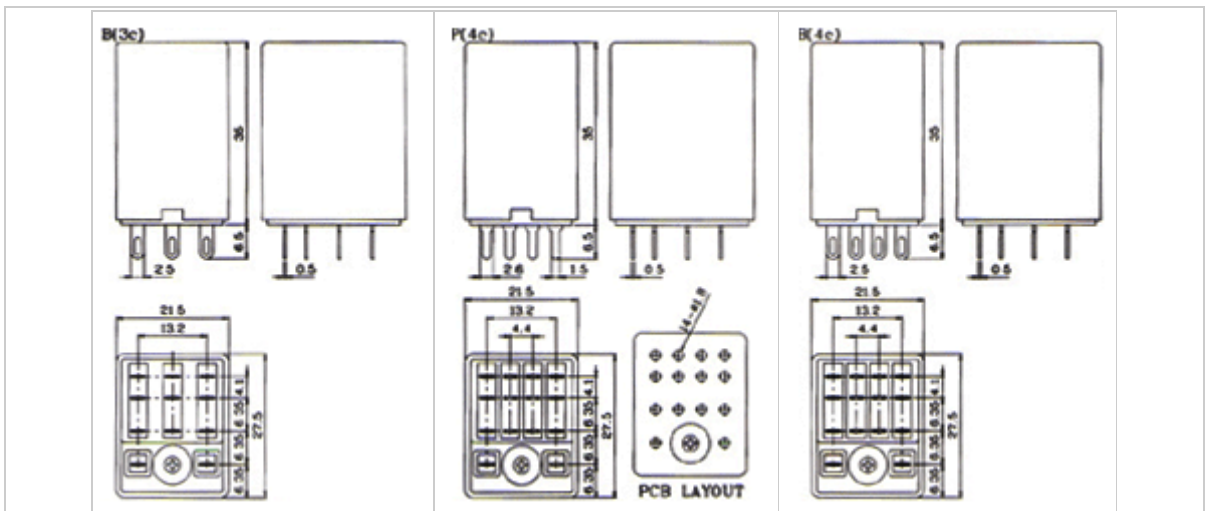

WIRING DIAGRAMS (Bottom View)

